


SYSTEMATIC QUALITY

# MarkLED i1

Product information

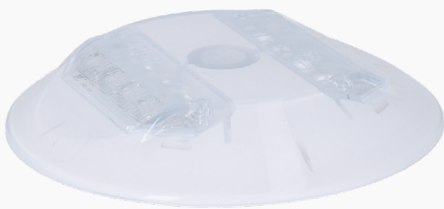

**GIFAS**  
ELECTRIC

09|27

## Introduction

Introduction



Page 3

Page 3


## MarkLED i1

Product/System

Technical data

Applications

Product range



Page 4

Pages 4-9



Pages 5-6



Page 7



Pages 8-9

## Accessories

Power supply unit

Guard plate


Sealing compound

Joint profile




Page 10


Pages 10-11



Page 11



Page 11




Page 11

## LED guidance systems – for safe traffic routing



MarkLED i1, top view

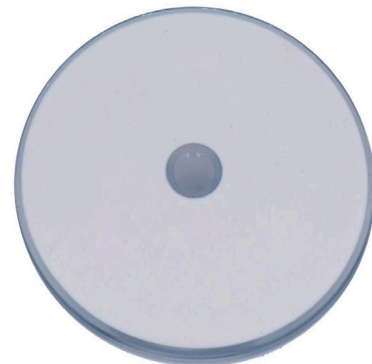

MarkLED i1, bottom view

Our product line of optical guidance devices is applicable in tunnels, roundabouts or on the road in general.

We have detailed information, documentation, certificates for our system MarkLED i1 which we would be appreciate to send if you are interested.

### Why optical guidance systems?

An optical guidance device improves recognition of lanes or obstacles, particularly during times of poor visibility (at night, fog, etc.) as well as vulnerable traffic areas such as tunnels, curves, roundabouts or traffic islands. The signals provide a very high degree of safety for traffic.


### Your benefits at GIFAS

- certified products
- quick and easy installation
- latest LED technology, very low power consumption
- no series capacitors necessary
- this provides an end-to-end uninterruptible supply line
- dimmable by control unit
- simple design, minimised risk of failure
- low-maintenance
- many years of experience with inductive systems
- this means a high level of technical and product and application know-how

### Our services

- many years of know-how, experienced Project Manager
- individual advice, also on site
- expert advice on installation and bringing into service
- creating CAD documents and tunnel disposals
- own service team with professional equipment



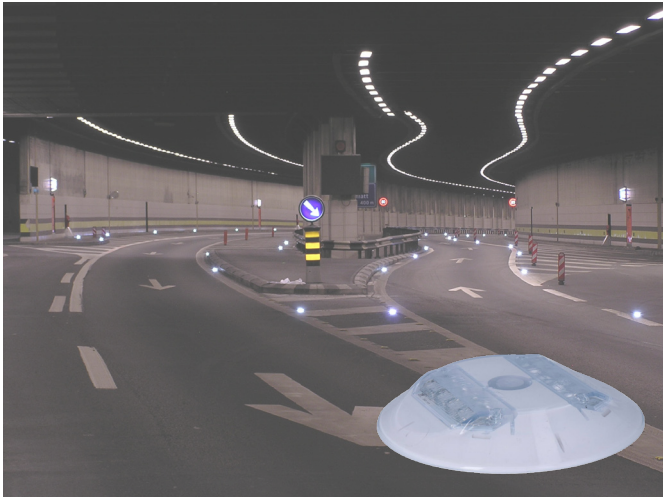

The power supply for the MarkLED i1 is provided inductively, i.e. wirelessly via Wireless Power Transfer (WPT). This allows complete enclosure of the light module, which is thereby optimally protected against environmental conditions. In the event of a defect, the supply line remains intact. The light module can be easily removed and replaced with a new one. No galvanic connection to the supply line is necessary. The power supply for the light module is provided via the completely enclosed cable drum recessed in the floor.

### Remark

Only system products from GIFAS may be used, in order to fulfil the warranty conditions. GIFAS system products are carefully matched and tested for safe and trouble-free operation. The use of third-party products results in the loss of warranty claims and may adversely affect the safety features of the system.

### Product features


- dimmable, switchable, flashing, lightning
- latest LED technology with integrated optics
- Impact-resistant, UV-resistant polycarbonate case
- scratch-resistant coating
- self-cleaning design
- completely enclosed
- quick and easy mounting and replacement


### Product documentation

#### Installation instructions



#### Test reports

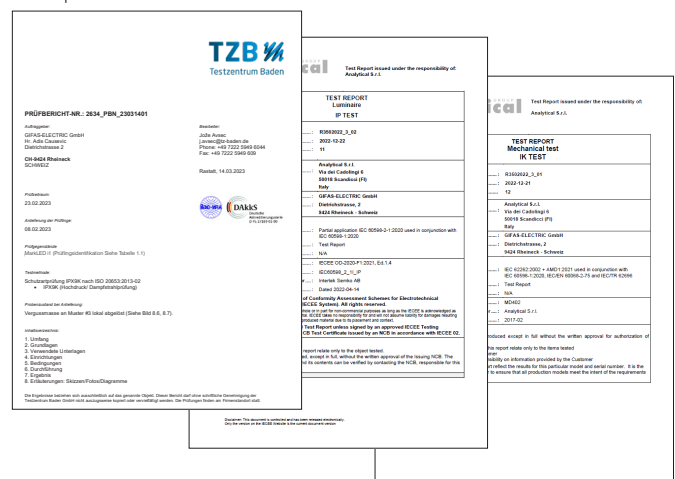


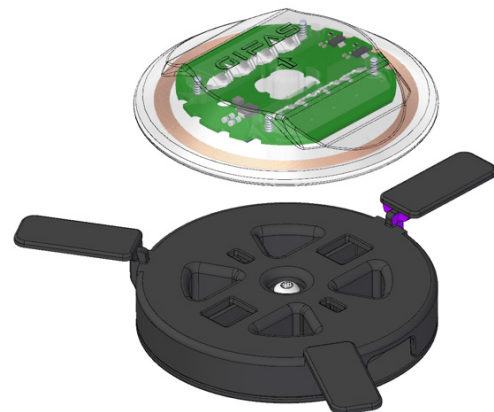

## Technical Data


Direction of light:	single or double-sided with 4 LEDs each
Colour temperature :	white approx. 5'600K
Light intensity:	65 cd
Protection category:	IP68 / IP69K
Protection class:	III
Impact resistance:	IK10
Feeding:	inductive
Power consumption:	< 2.5W
Diameter:	115 mm
Height:	20 mm
Casing:	Polycarbonate transparent, nano-coated and dirt-repellent
Temperature resistance:	-40° C to +55° C
Axle load:	to 5t (slow traffic with air-filled tyres)
Mounting:	Joining by gluing

## One-components MarkLED i1

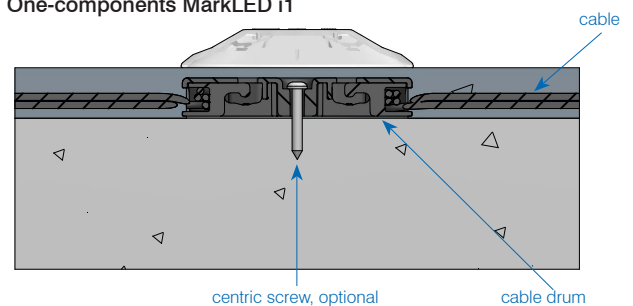


## Scheme light emission

MarkLED i1 The system meets the regulations of the Federal Road Authority (e.g. BAST-Germany, FEDRO Switzerland).



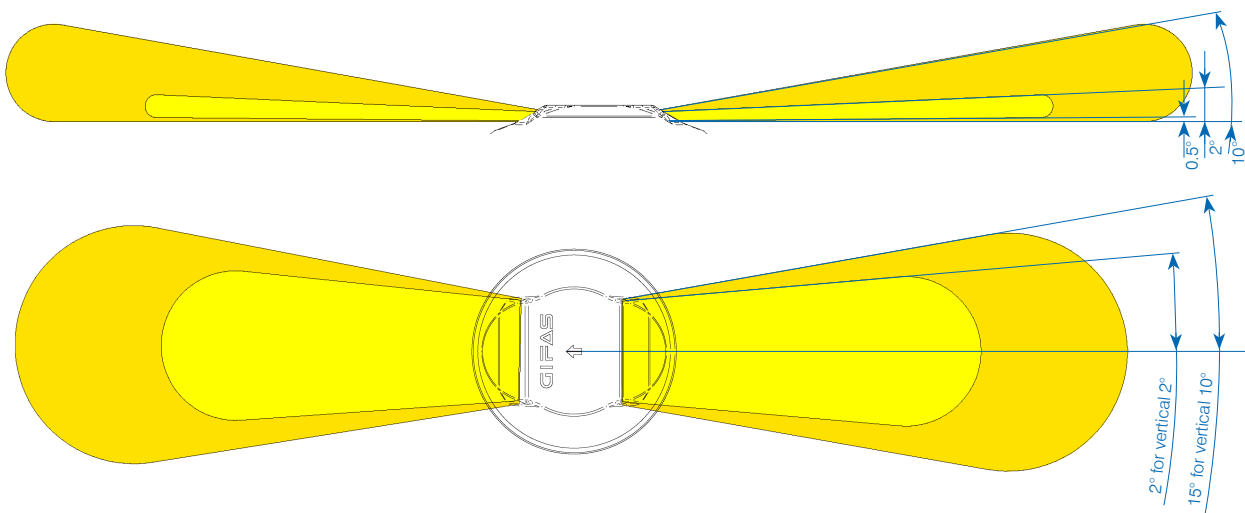


## Installation situation

Slot lateral

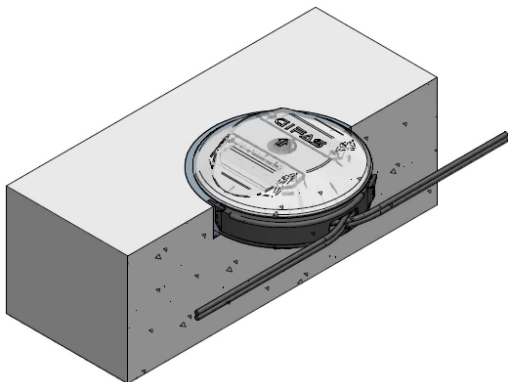

Slot central

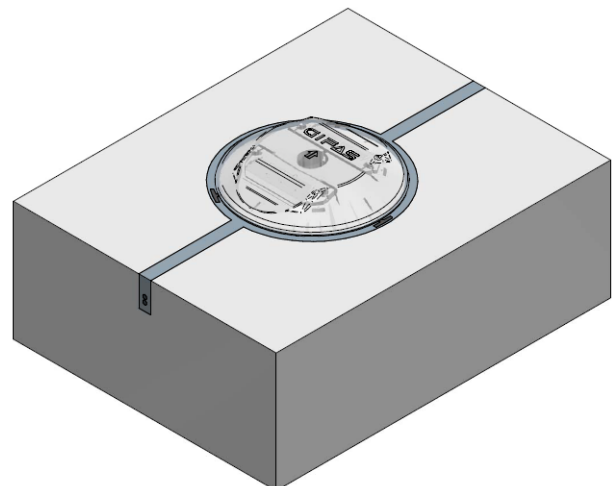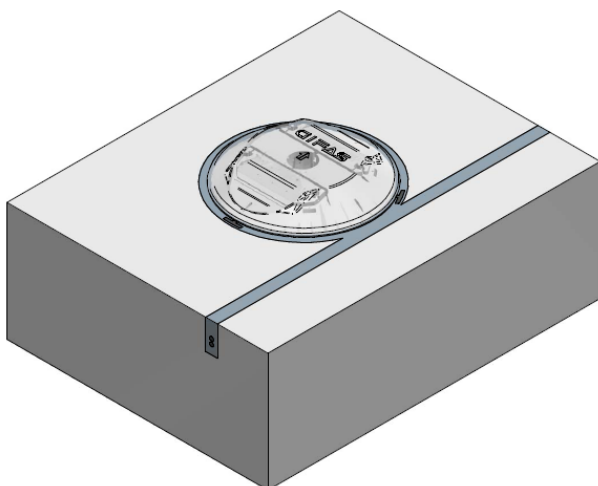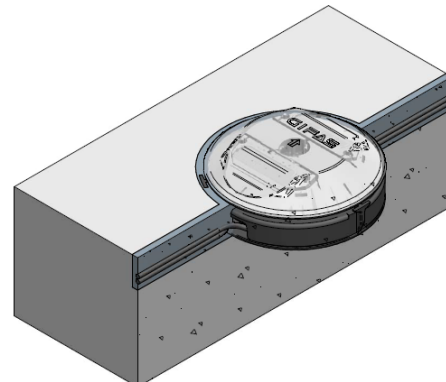



## Light module



## System cable



Item no.	Designation
860950	MarkLED i1 light module, IP68/IP69K, IK10, 2x4 LED, white 5'600K, casing Ø 115 mm, h = 20 mm

The system cable is a single-core, double insulated cable which is used to supply the signal units. It is continuous over the entire system length and therefore insulated end-to-end. It has excellent ozone, chemical, weather and UV resistance and is also halogen-free with enhanced behaviour in case of fire.

Note: An additional 2.5m of system cable is required for the installation of each light module.

## Capacitor box with capacitor\*




Item no. 861239

### Technical Data

Measured DC	
Conductor resistance at 20° C:	< 14Ω/k
Nominal conductor-to-earth voltage:	1800 VAC
Nominal conductor-to-conductor voltage:	3000 VAC
External diameter:	3.35 mm
Conductor cross-section:	1.5 mm <sup>2</sup>
Construction of n×Ø:	37×0.23 mm
Conductor:	tin-plated, finely stranded (EN 60228 Kl. 5)
Insulation, internal (white):	RADOX EI 110
Insulation, external (black):	RADOX EI 109



Item no. 861240

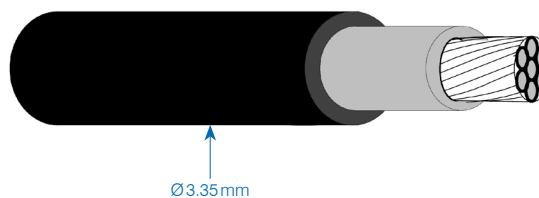

\*this can vary depending on the project

Item no.	Designation
861239	Housing with capacitor, applic. to InduLED Basic, housing for surface mounting
861240	Housing with capacitor, applic. to InduLED Basic, housing for recessed mounting

Item no.	Designation
225755	InduLED Basic system cable 1×1.5 mm <sup>2</sup> , double insulated



## Cable drum



The cable drum, consisting of a holder and cover, is placed under each light module. It is used for correct guidance and winding of the system cable and provides the inductive coupling to the light module. No tools are required for mounting.


After the cable has been wound on and the drum closed, it can be placed in the hole. As an option, the cable drum can be anchored in the floor with a central screw. The three wings define the correct distance to the mounting surface of the light module.

After placement and sealing, the wings can be broken off and disposed of.

The cable drum is then invisibly integrated in the floor.

### Technical Data

Material:	Saxaketon 160FR GF30
Diameter (without wings):	122 mm
Height (without wings):	19 mm
Mounting position:	horizontal
Hole diameter:	Ø130 - 150 mm
Drilling depth:	min. 25 mm
Fastening (optional):	screw centre
Encapsulation:	f.e. mortar, BüroFix, ...

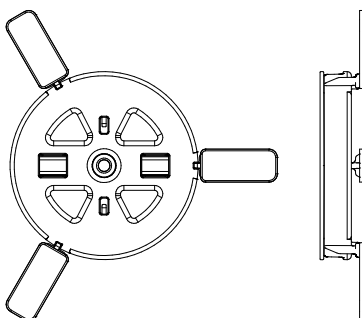

Item no.	Designation
860951	InduLED Basic cable drum holder
860952	InduLED Basic cable drum lid

## Adhesive and sealant



The light module is glued to the base with the help of the sealant and adhesive. Our adhesive is a single-component adhesive that polymerised itself into an elastic compound as it reacts to the air humidity. It also has no silicone or solvents.

### Technical data

Basis:	MS-Polymer
Cross-linking system:	polymerisation through air humidity
Temperature resistance:	-40°C to +90°C
Processing temperature:	approx. +5°C to +30°C
Color:	pebble gray
Processing:	using a hand spray gun
Packaging:	cartridge of 290 ml

Item no.	Designation
020157	Adhesive and sealant hybrid pebble grey, 290 ml Permafix 1153

## Power supply unit



Power supply unit for inductively coupled guidance system, wall or 19" rack mounting.

### Product features

- The control system enables the power supply of system lengths of up to 500m.
- Control of up to 50 Basic LED lighting modules.

### Technical Data

#### Function statuses

Status of the control system resp. status during start-up: LED status display (red/green)  
 Passive functions for the LED signal units: Continuous lighting, up to 4 individually adjustable dimming levels (15- 100%), synchronous flashing

#### Connection options

Input: Standard 230V  
 Output: 2-pin Phoenix contacts  
 Digital I/O: 8 inputs, 2 outputs

#### Electrical data

Supply voltage: 230V, 50Hz  
 Current consumption (max.): 3A  
 Power factor: ca. 0.94  
 Power consumption (max.): 700W  
 Main power fuse: min. 6A ... max. 13A  
 Output current (max.): 2.5 A (rms)  
 Frequency range of the power transmission: 37.6kHz  
 Typical cable current: 1.5 A (rms)  
 Typical cable voltage: < 300V (rms)  
 Certificates (pending): CE: JA/RoHS: JA  
 International standards and approvals:

#### Operating environment



Operating temperature: -10°C to 50°C  
 Humidity: 10% to 80% (non-condensing)  
 Cooling: Convection (Fan, internal)

#### Dimensions

Weight: approx. 20kg  
 Dimensions (W×H×D): 422mm×400mm×152mm (without mounting brackets)

#### Installation

Installation environment: switchgear cabinet / wall mounting  
 Clearance  
 - side & below: 10cm  
 - above: 20cm  
 - front: 35cm  
 Fixing method: brackets for rear panel & 19"rack (can be changed, depending on the mounting position)

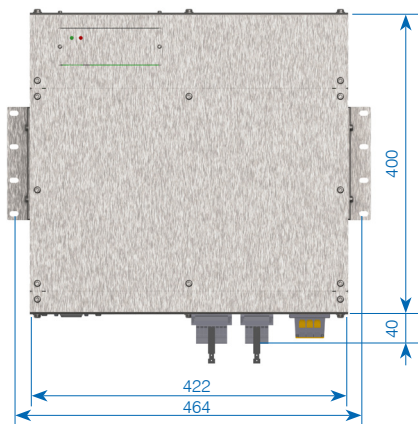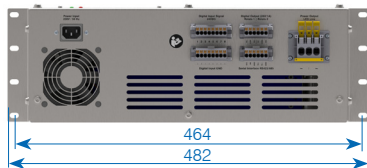

Item no.	Designation
861050	InduLED Basic control unit 230VAC/3A, max. 500m system length, casing 422×400×152mm

## Guard plate



In winter, there is often the problem that the snowploughs touch the light modules when entering and exiting the tunnels. That entails that the MarkLED i1 can be sheered off and should be exchanged. Against it we can offer a protective plate. That protects the first MarkLED's at the entrance and exit of the tunnels.

Item no.	Designation
024446	Guard plate V4A, 190×150×24 mm
024676	Countersunk screw V4A with I-6Kt. without shaft M8×70 mm
024677	Nylon plug Fischer M8-S×50 mm
019180	Nylon plug Fischer Ø6×35 mm, without surrounding
019290	Chipboard screw V4A, Ø5×80/50 mm

## Sealing compound




The recommended sealing compound is heated to 160°–180°C while being constantly mixed. The compound is applied using a spouted container or grouting lance. Excess compound must be removed by scraping once it has fully cooled.

### Technical Data

Colour:	black
Form of delivery:	1 box with 24 cubes of 700 g each
Sealing temperature:	160°C - 180°C
Weight per unit volume:	1.2 g/cm <sup>3</sup>

Item no.	Designation
208907	Hot/liquid/bitumen sealing compound TOK-Melt N2

## Joint profile

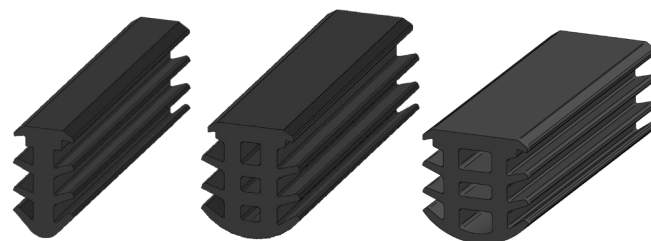

item no. 11675

item no. 140862

item no. 155809

The milled groove of the optical guidance system must be sealed against environmental conditions. A simple and low-cost solution is to use the halogen-free GIFAS joint profile made of EPDM. This is inserted in the slot. It is self-locking and available in three different widths. A stable and smooth slot with slot widths of 6 -16 mm is the prerequisite for use.

### Technical data

Material properties:	halogen-free, no corrosive and toxic gases
Shore hardness A:	70° ±5%
Special weight:	1.23 kg/l
Elongation at break:	237% DIN 53504
Breaking stress:	11.2 MPa DIN 53504

Item no. 116753	
Exterior dimensions:	9.3 mm × 17.1 mm
Groove width:	6 - 8 mm
Nominal section:	89 mm <sup>2</sup>
Weight:	109 kg/km

Item no. 140862	
Exterior dimensions:	14.5 mm × 17.1 mm
Groove width:	10 - 12 mm
Nominal section:	146 mm <sup>2</sup>
Weight:	177 kg/km

Item no. 155809	
Exterior dimensions:	17.35 mm × 17.5 mm
Groove width:	14 - 16 mm
Nominal section:	171 mm <sup>2</sup>
Weight:	254 kg/km

Item no.	Designation
116753	Joint profile EPDM 70° Shore for groove 6-8 mm, 9.3×17.1 mm, black
140862	Joint profile EPDM 70° Shore for groove 10-12 mm, 14.5×17.1 mm, black
155809	Joint profile EPDM 70° Shore for groove 14-16 mm, 17.35×17.5 mm, black

GET IN TOUCH WITH US

News about the assortment and specific solutions can be found on our website:

[www.gifas.ch](http://www.gifas.ch)

We reserve the right to make technical modifications. V 0724



**GIFAS**  
ELECTRIC

GIFAS-ELECTRIC GmbH  
Dietrichstrasse 2  
CH-9424 Rheineck

+41 71 886 44 44  
+41 71 886 44 49  
info@gifas.ch  
www.gifas.ch