



Working lamp suprabeam®

SUPRABEAM I2r



Item no. 860829

Technical Data

Material housing: Aluminium, 2K plastic
 Dimensions (L×W×H): 220.6×46×66.5 mm
 Weight: 373 g
 Protection category: IP54 / IK07
 Operating range of temperature: -10°C to +40°C
 Power source: Li-ion 3.7V, 2'600mAh, 9.62 Wh
 Colour temperature : 6'500 K
 Light output levels:
 - Top light: 120 lm
 - Dimming: 700 - 60 lm
 Luminous period:
 - Top light: 10h
 - Dimming: 2- 16h
 Special features:
 - hook
 - magnetic foot

SUPRABEAM I4r



Item no. 860830

Technical Data

Material housing: Plastic
 Dimensions (L×W×H): 260×53×39.3 mm
 Weight: 382 g
 Protection category: IP65 / IK09
 Operating range of temperature: -10°C to +40°C
 Power source: Li-ion 3.7V, 3'350mAh, 12.39 Wh
 Colour temperature : 6'500 K
 Light output levels:
 - High: 1'000 lm
 - Medium: 500 lm
 - Low: 250 lm
 - Top light: 200 lm
 Luminous period:
 - High: 1 h 15 min
 - Medium: 2 h 30 min
 - Low: 4 h 15 min
 Special features: Magnetic foot and two hooks on the backside

SUPRABEAM D4r



Item no. 860831

Technical Data

Material housing: Plastic
 Dimensions (L×W×H): 116×101×41.5 mm
 Weight incl. battery: 400 g
 Protection category: IP65 / IK07
 Operating range of temperature: -10°C to +40°C
 Power source: Li-ion 3.7V, 5'200mAh, 19.24 Wh
 Colour temperature : 6'500 K
 Light range:
 - Flood light: 45 m
 - Spot light: 125 m
 Light output levels:
 - High: 1'400 lm
 - Medium: 900 lm
 - Low: 450 lm
 - Spot light: 400 lm
 Luminous period:
 - High: 3h
 - Medium: 4h 15min
 - Low: 7h
 - Spot light: 6h 30min
 Special features: Magnetic bracket

Item no.	Designation
✓ 860829	Working lamp SUPRABEAM I2r 700lm IP54, Li-ion 3.7V 2.6Ah, USB-C adapter
✓ 860830	Working lamp SUPRABEAM I4r 1'000lm IP65, Li-ion 3.7V 3.35Ah, USB-C adapter
✓ 860831	Working lamp SUPRABEAM D4r 1'400lm IP65, Li-ion 3.7V 5.2Ah, USB-C adapter

✓ from stock, offer subject to prior sale

Working lamp suprabeam®

SUPRABEAM W4r



Item no. 860832


Technical Data

Material housing:	Aluminium, Plastic
Dimensions (L×Ø):	236.6×266×59 mm
Weight:	1'355 g
Protection category:	IP65 / IK07
Operating range of temperature:	-10°C to +40°C
Power source:	Li-ion 11 V, 5'200 mAh, 57.2 Wh
Colour temperature :	6'500 K
Light range:	80 m
Light output levels:	
– High:	4'400 lm
– Medium:	2'200 lm
– Low:	1'100 lm
Luminous period:	
– High:	1 h 30 min
– Medium:	3 h 15 min
– Low:	6 h 30 min
Special features:	Operation with cable (230 V) or with battery

Item no.	Designation
✓ 860832	Arbeitsleuchte SUPRABEAM W4r 4'400 lm IP65, Li-ion 11 V 5.2 Ah, USB-C Adapter
✓ 860835	Arbeitsleuchte SUPRABEAM W6r 4'600 lm IP54, Li-ion 14.8 V 5.2 Ah, USB-C Adapter

Accessories/spare parts	
✓ 860833	Stativ SUPRABEAM zu W4r/W6r für Höhe 0.73 - 1.65 m
✓ 860834	Magnethalterung SUPRABEAM zu W4r
✓ 860836	Ersatzakku Li-ion 5.2 Ah 14.8 V zu SUPRABEAM W6r

SUPRABEAM W6r

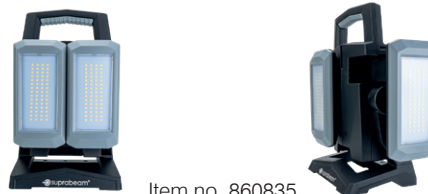

Item no. 860835

Technical Data

Material housing:	Plastic
Dimensions (L×Ø):	288×176×131 mm
Weight:	2'410 g
Protection category:	IP54 / IK07
Operating range of temperature:	-10°C to +40°C
Power source:	Li-ion 14.8 V, 5'200 mAh, 76.96 Wh
Colour temperature :	5'700 K
Light range:	80 m
Light output levels:	
– Max:	4'600 lm
– High:	3'000 lm
– Medium:	1'500 lm
– Low:	750 lm
Luminous period:	
– Max:	2 h 15 min
– High:	3 h 30 min
– Medium:	7 h
– Low:	14 h
Special features:	– External battery with power-bank function – slewable 180°



Item no. 860833



Item no. 860836



Item no. 860834

✓ from stock, offer subject to prior sale

2/2